



ITT

Wastewater

Goulds Pumps

LEP07 Submersible Effluent Pumps



FEATURES

- Corrosion-resistant construction.
- Stainless Steel motor casing and fasteners.
- Glass-filled thermoplastic impeller and casing.
- **Bearing:** Upper and lower heavy duty ball bearing construction.
- Motor is permanently lubricated for extended service life and is powered for continuous operation. All ratings are within the working limits of the motor.
- Hard coated 400 series stainless steel shaft for improved corrosion resistance.
- Optional float switch is adjustable for various liquid levels. Easily removed for direct pump operation or switch replacement.
- Complete unit is lightweight and portable.



Goulds Pumps is a brand of ITT Corporation.

www.goulds.com

Engineered for life



ITT

GOULDS PUMPS Wastewater

APPLICATIONS

Specially designed for the following uses:

- Effluent systems
- Water transfer
- Dewatering
- Heavy duty sump

SPECIFICATIONS

- Discharge size: 1½" NPT.
- Capacities: to 52 GPM.
- Maximum head: 22 feet TDH.
- Max. solids: ¾" spherical
- Temperature: 104° F (40° C) maximum liquid temperature.

MOTOR

- Single phase, 3450 RPM
 - LEP0711, ¾ HP, 115 V, 60 Hz.
 - LEP0712, ¾ HP, 230 V, 60 Hz.
- Built-in thermal overload protection with automatic reset.

PERFORMANCE RATINGS

Total Head (ft. of water)	Gallons Per Minute
	LEP07
5	52
10	46
15	37
20	18
22	0

MODELS

Order No.	HP	Volts	Phase	Maximum Amps	RPM	Solids Handling	Power Cord Length	Float Switch	Weight (lbs.)
LEP0711AF	¾	115	1	6.9	3450	¾"	20'	Built-in	16
LEP0712AF		230		3.4				Built-in	
LEP0711F		115		6.9				N/A	
LEP0712F		230		3.4				N/A	
LEP0711ATF		115		6.9				Piggyback	
LEP0712ATF		230		3.4				Piggyback	

"A" denotes automatic operation. Pump includes float switch.
 "F" denotes 20 foot power cord.

- Permanent-split-capacitor type.
- Amps: 6.9 maximum for LEP0711.
3.4 maximum for LEP0712.
- Class F insulation.
- Hardened stainless steel shaft.
- Air filled design.
- Power cord length: 20 feet.

FLOAT SWITCH OPTIONS

- LEP07_ A is supplied with a built-in float switch for automatic operation.
- LEP07_ AT is supplied with a replaceable float switch. This switch is a piggy-back type with 5-15P or 6-15P three prong grounding plug.

AGENCY LISTING



Canadian Standards Association
File #LR114251




Underwriters Laboratories
File #83318

Goolds Pumps is ISO 9001 Registered.



ITT


GOULDS PUMPS Wastewater

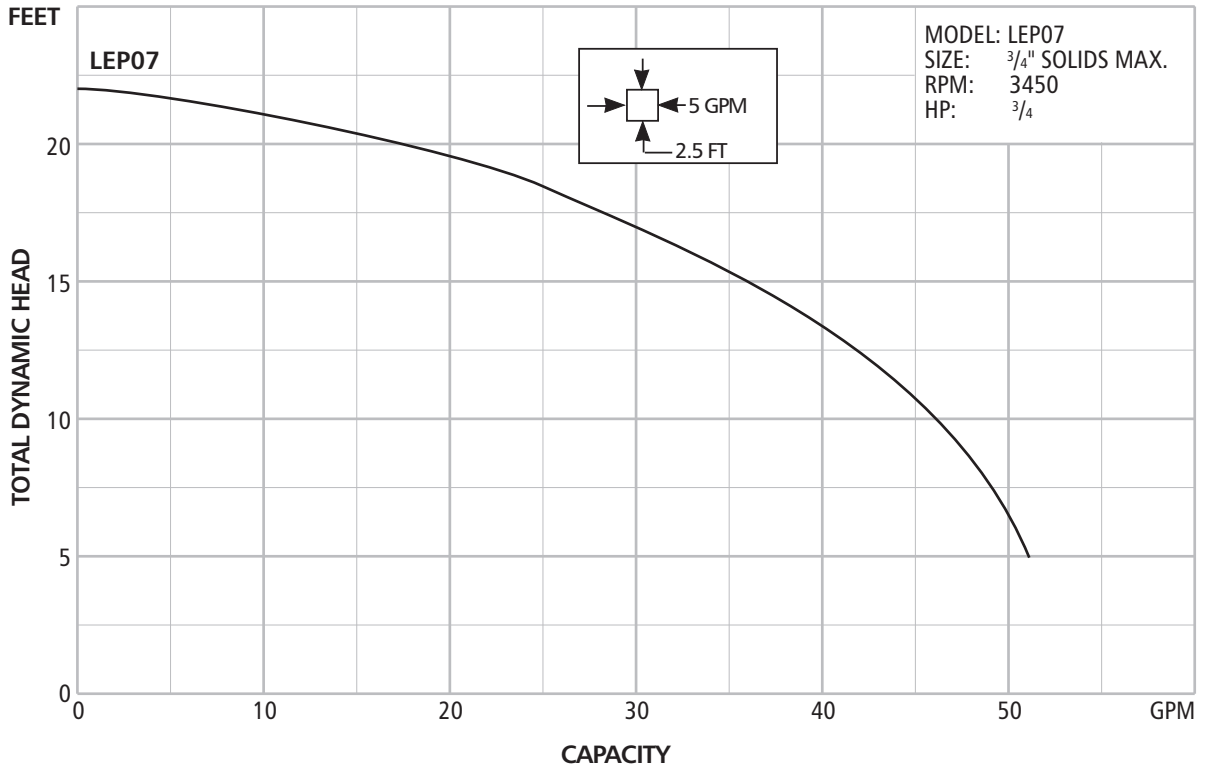

* Vertical distance from water level to highest point in discharge – plus pipe friction.
 Maximum pump rated submergence is 16 ft. for LEP07.

COMPONENTS *(for reference only)*

Item No.	Description
1	Impeller
2	Rugged thermoplastic base
3	Stainless steel pump casing
4	Shaft
5	Ball bearings
6	O-rings
7	Power cord
8	Air filled motor
9	Thermoplastic motor cover/handle

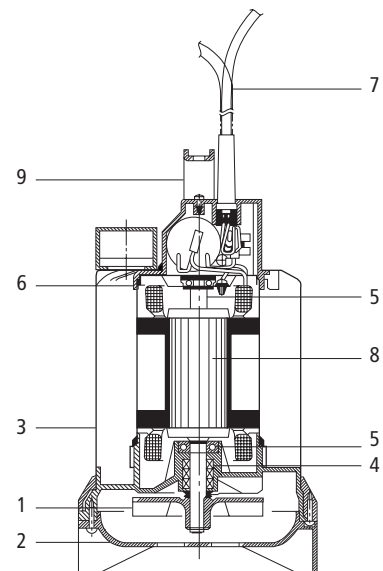




ITT

Wastewater

DIMENSIONS

(All dimensions are in inches. Do not use for construction purposes.)

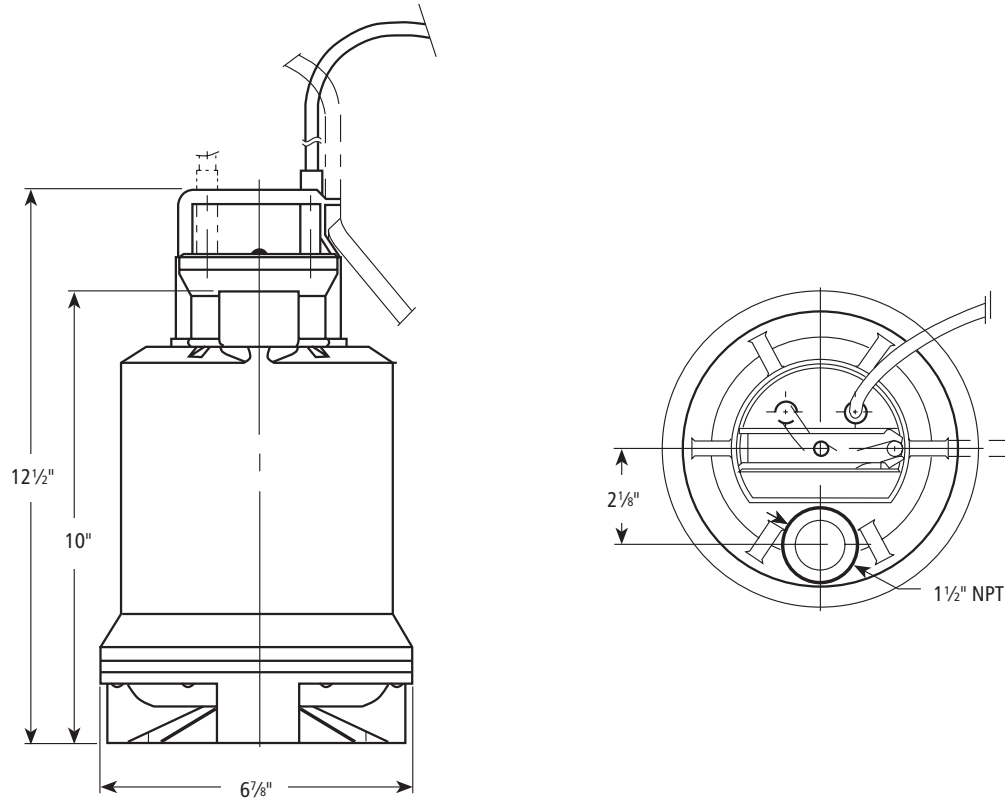

Goulds Pumps and the ITT Engineered Blocks Symbol are registered trademarks and tradenames of ITT Corporation.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

BLEP07 April, 2007

© 2007 ITT Corporation

Engineered for life