


Turbine

Goulds Pumps

Model 7TLC

(Effective June 1, 2006)

GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT			SERVICE	GPM CAPACITY	FT. TDH	RPM
						% EFFICIENCY

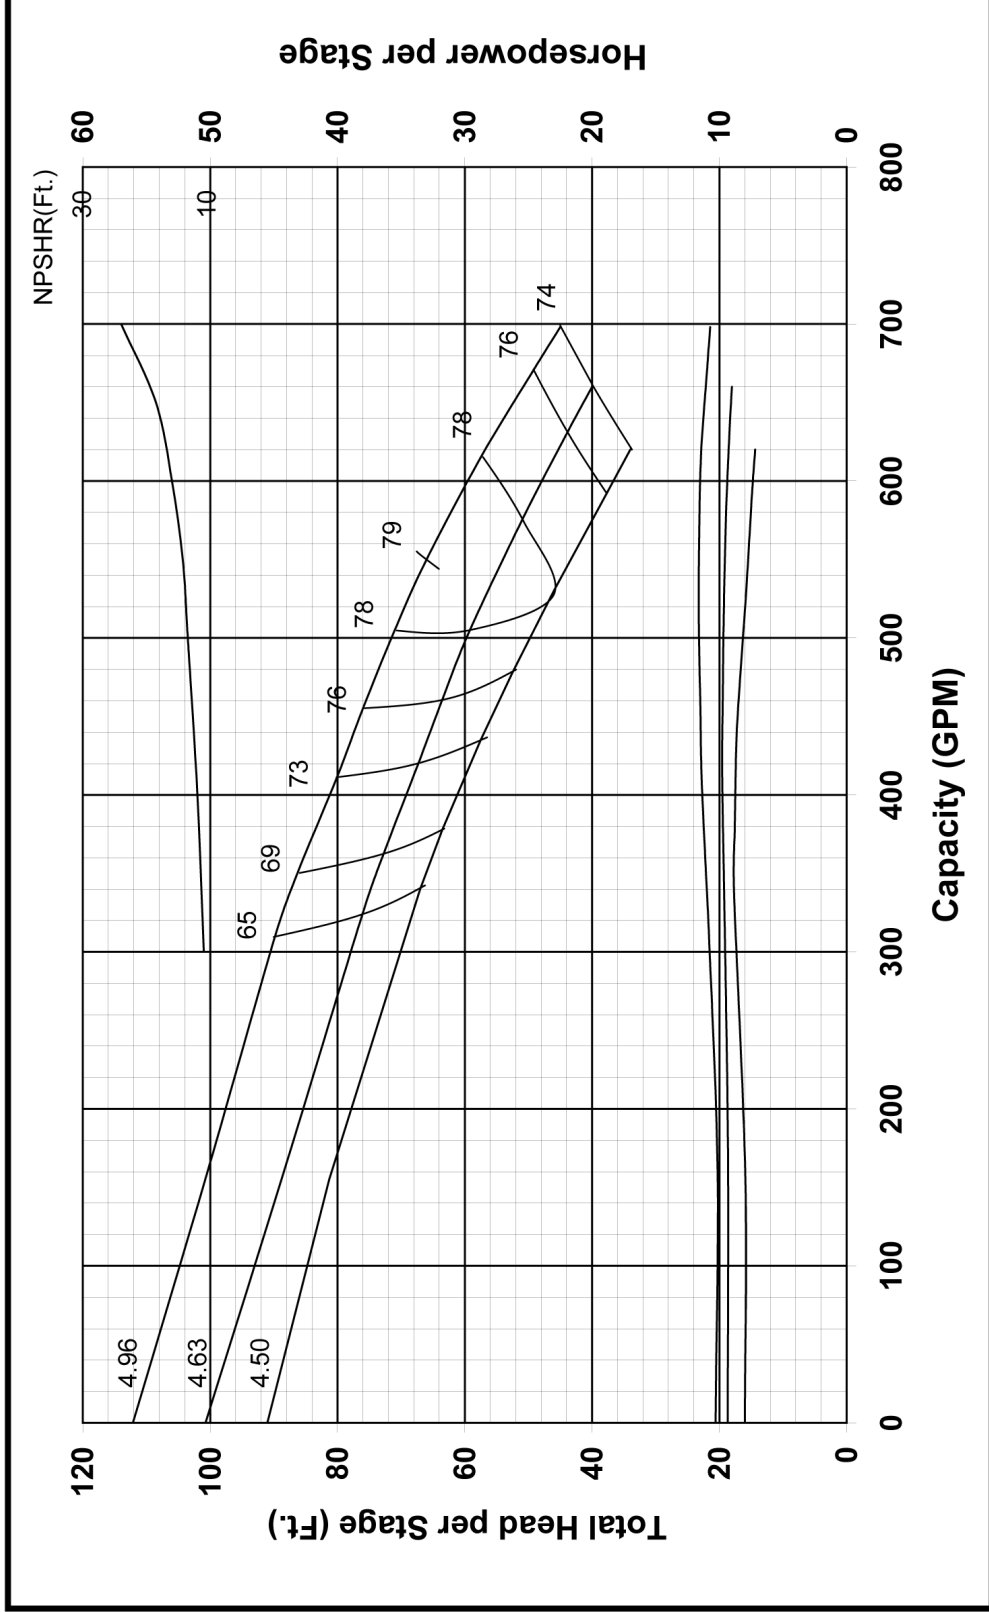

Curve No.	E6207TAPC1
Model	7TLC
RPM	3450
EFFICIENCY CORRECTION	
1-STAGE	-3.0
2-STAGE	-2.0
3-STAGE	-1.0
4-STAGE	0.0
Impeller	ENCLOSED
Ns =	3494
K =	4.5 LBS/FT
K(Bal.)=	N/A
Bowl O.D.	7.13"
Bowl Lateral	0.38"
Max. PSI	310
Disch size	5", 6"


TURBINE OPERATIONS
Lubbock, Texas

BOWL PERFORMANCE CURVE
BASED ON PUMPING CLEAR,
NON-AERATED WATER.
RATED POINT ONLY IS
GUARANTEED. CURVES
REPRESENT SINGLE STAGE
PERFORMANCE BASED ON
TEST OF MULTI-STAGE BOWL
ASSEMBLY. EFFICIENCY
CORRECTION IS REQUIRED
FOR LESSER STAGES.



Goulds Pumps is a brand of ITT Corporation.
www.goulds.com

Engineered for life




Turbine

Goulds Pumps

Model 7THC

(Effective June 1, 2006)

GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT			SERVICE	GPM CAPACITY	FT. TDH	RPM
						% EFFICIENCY

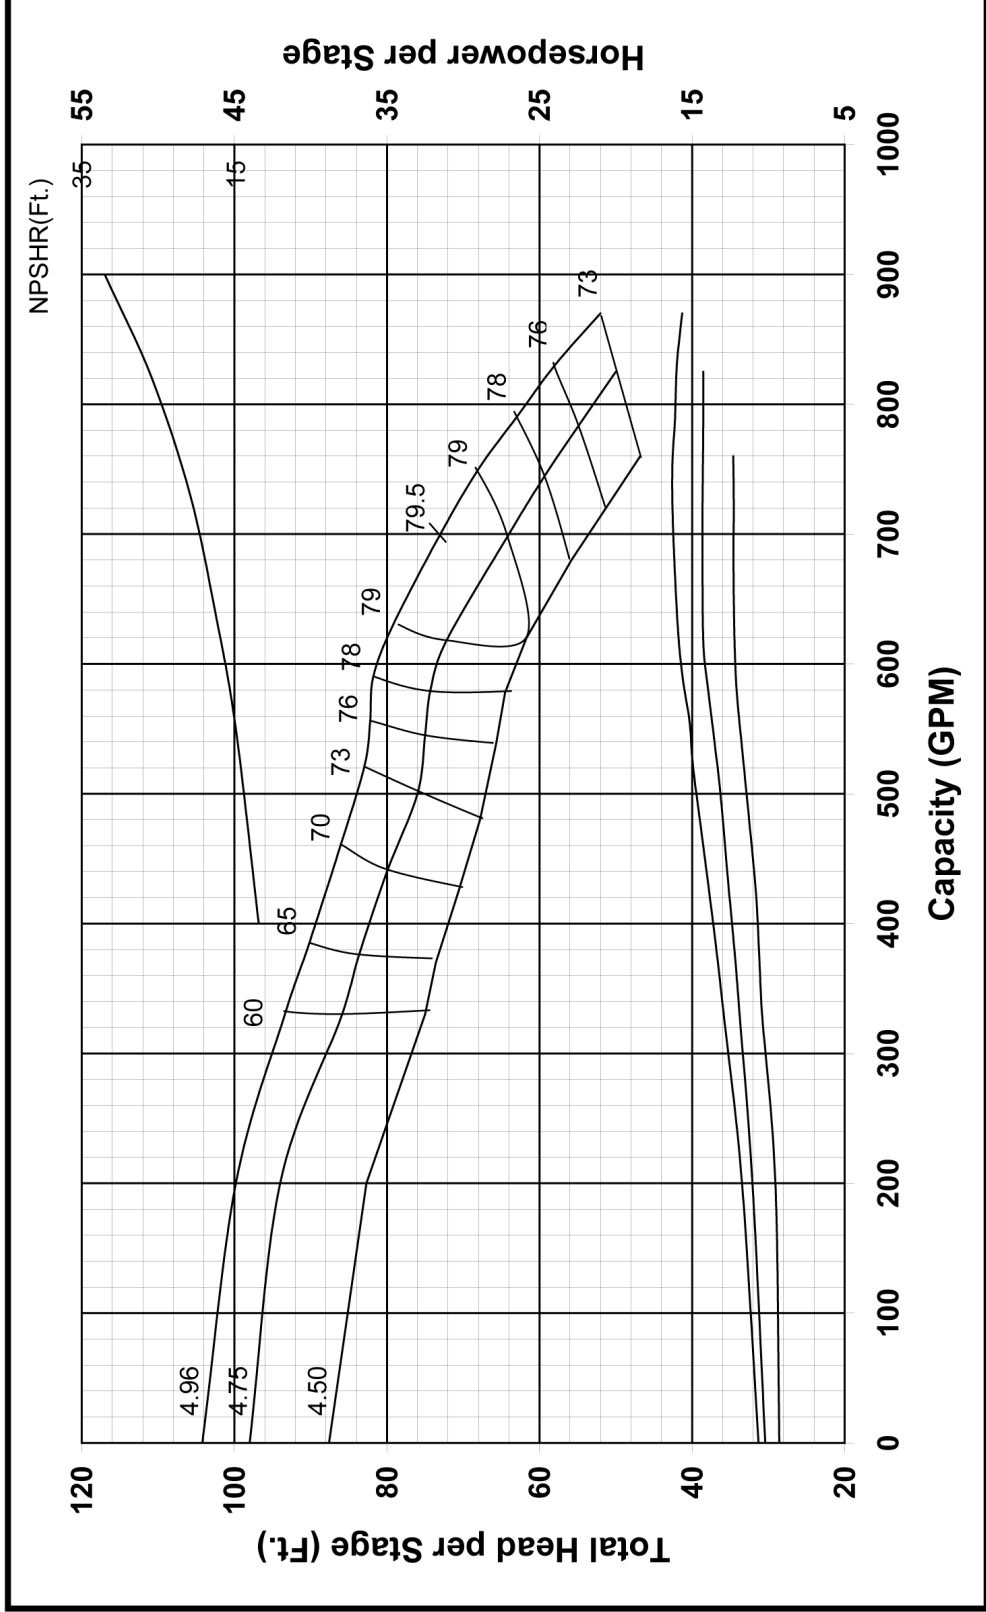

Curve No.	E6207TFPC2
Model	7THC
RPM	3450
EFFICIENCY CORRECTION	
1-STAGE	-3.0
2-STAGE	-2.0
3-STAGE	-1.0
4-STAGE	0.0
Impeller	ENCLOSED
Ns =	3655
K =	4.56 LBS/FT
K(Bal.) =	N/A
Bowl O.D.	7.13"
Bowl Lateral	0.38"
Max. PSI	310
Disch size	5" 6"
TURBINE OPERATIONS	
Lubbock, Texas	
BOWL PERFORMANCE CURVE	
BASED ON PUMPING CLEAR, NON-AERATED WATER.	
RATED POINT ONLY IS GUARANTEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.	



Goulds Pumps and the ITT Engineered Blocks Symbol are registered trademarks and tradenames of ITT Corporation. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

C7TLC1 January, 2009

Copyright (c) 2009 ITT Corporation

Engineered for life