


Turbine

Goulds Pumps

Model 8RJLC

(Effective June 1, 2006)

GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT	SERVICE	GPM/CAPACITY	FT. TDH	% EFFICIENCY	RPM	

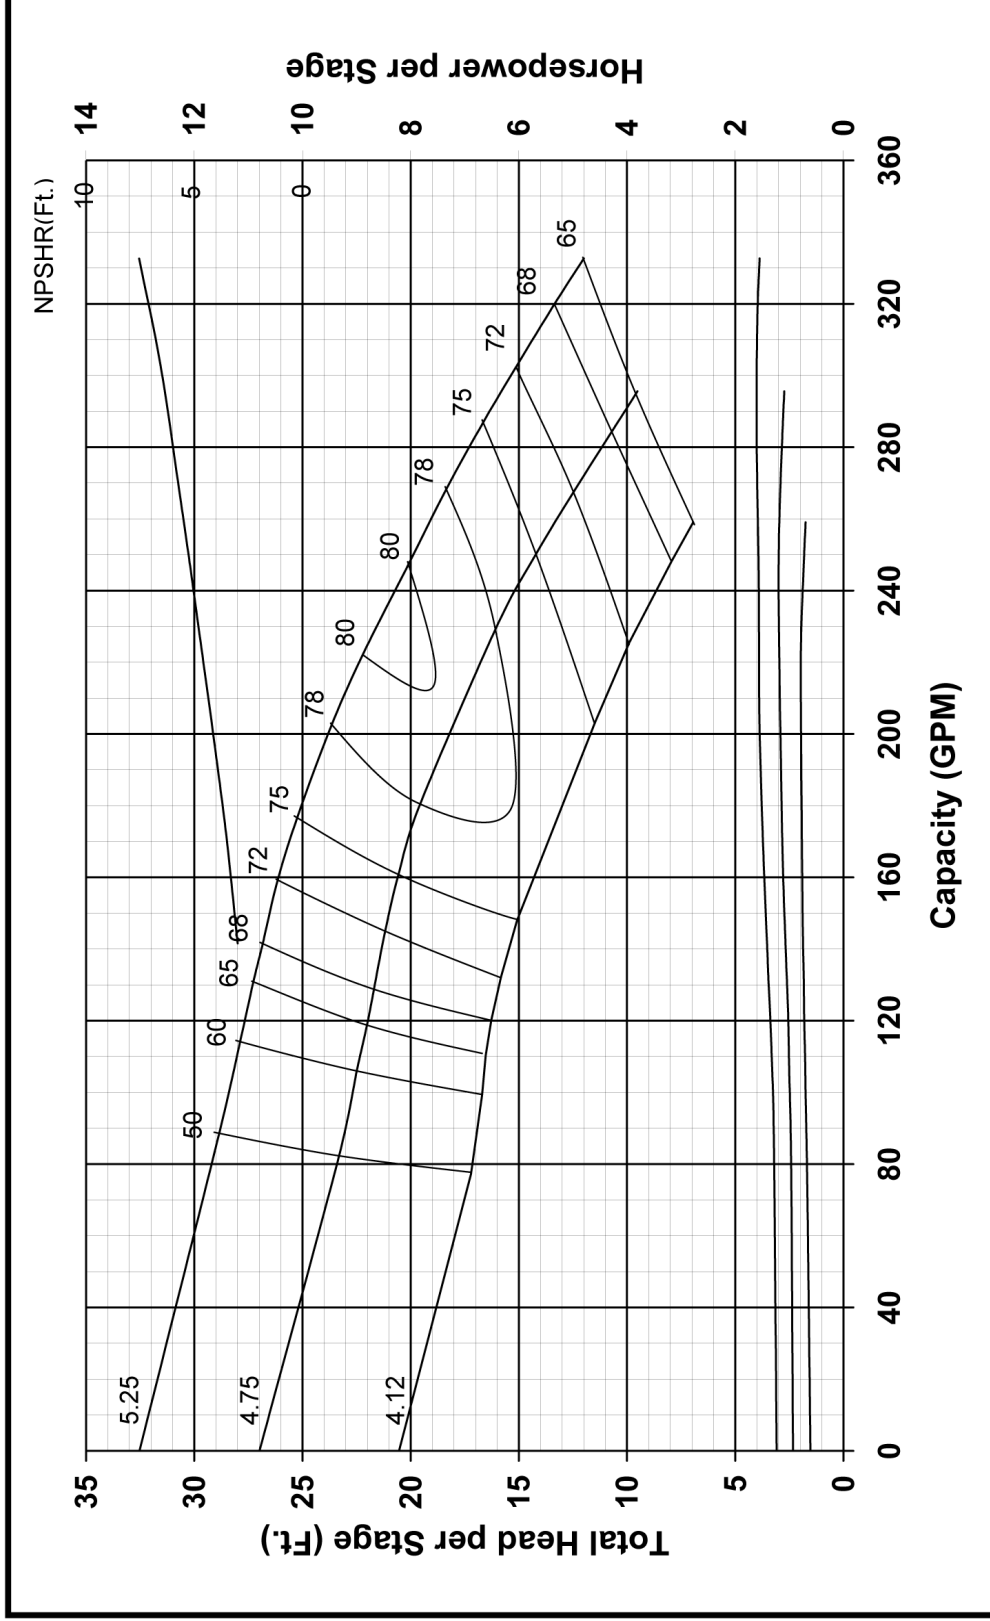


Curve No.	E6408REPC1
Model	8RJLC
RPM	1760
EFFICIENCY CORRECTION	
1-STAGE	
2-STAGE	
3-STAGE	
4-STAGE	
Impeller	ENCLOSED
Ns =	2768
K =	4.0 LBS/FT
K(Bal.) =	N/A
Bowl O.D.	7.50"
Bowl Lateral	0.62"
Max. PSI	425
Disch Size	4", 5", 6"
TURBINE OPERATIONS	
Lubbock, Texas	
BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARANTEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.	



Goulds Pumps is a brand of ITT Corporation.
www.goulds.com

Engineered for life




Turbine

Goulds Pumps

Model 8RJLO

(Effective June 1, 2006)

GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT			SERVICE	GPM CAPACITY	FT. TDH	% EFFICIENCY
						RPM

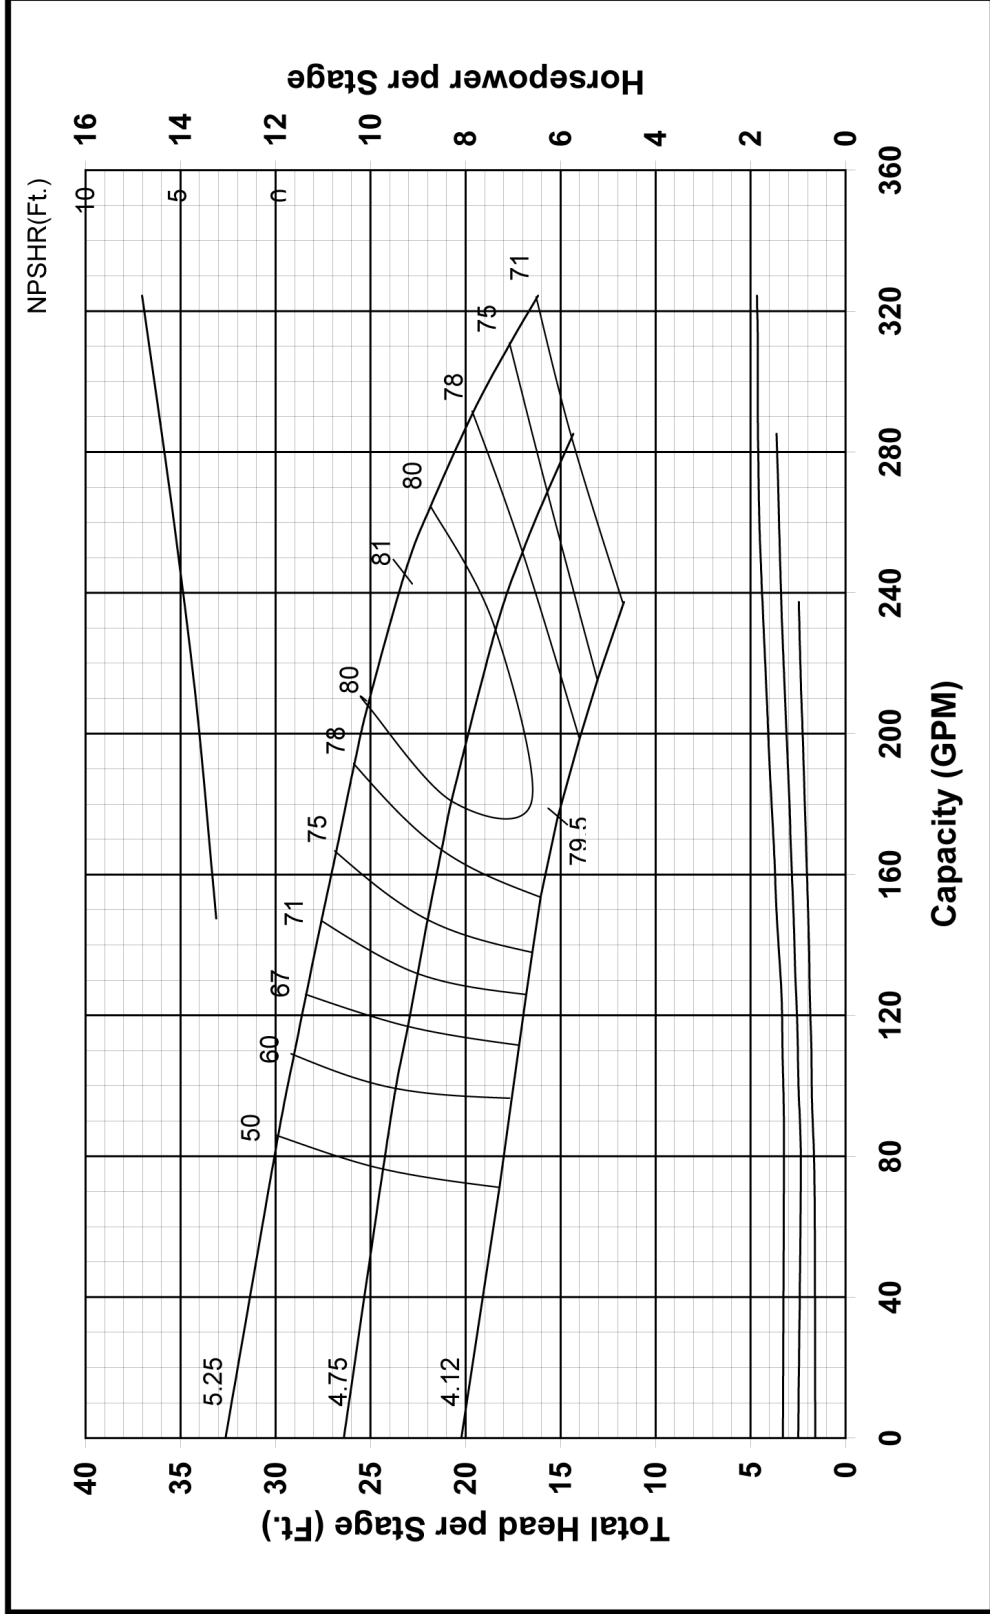

Curve No.	E6408RFPC1
Model	8RJLO
RPM	1760
EFFICIENCY CORRECTION	
1-STAGE	
2-STAGE	
3-STAGE	
4-STAGE	
Impeller	OPEN
Ns =	2614
K =	5.3 LBS/FT
K(Bal.) =	N/A
Bowl O.D.	7.50"
Bowl Lateral	0.62"
Max. PSI	425
Disch Size	4", 5", 6"
TURBINE OPERATIONS	
Lubbock, Texas	
BOWL PERFORMANCE CURVE	
BASED ON PUMPING CLEAR,	
NON-AERATED WATER.	
RATED POINT ONLY IS	
GUARANTEED. CURVES	
REPRESENT SINGLE STAGE	
PERFORMANCE BASED ON	
TEST OF MULTI-STAGE BOWL	
ASSEMBLY. EFFICIENCY	
CORRECTION IS REQUIRED	
FOR LESSER STAGES.	



Goulds Pumps and the ITT Engineered Blocks Symbol are registered trademarks and tradenames of ITT Corporation. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

C8RJLC2 January, 2009

Copyright (c) 2009 ITT Corporation

Engineered for life