


Turbine

Goulds Pumps

Model 9TLC

(Effective June 1, 2006)

GOULDS PROPOSAL NO.	GOULDS S.O. NO.	INQUIRY NO.	CUSTOMER P.O. NO.	P.O. DATE	ITEM NO.	CUSTOMER
PROJECT			SERVICE	GPM CAPACITY	IFT, TDH	RPM
						% EFFICIENCY

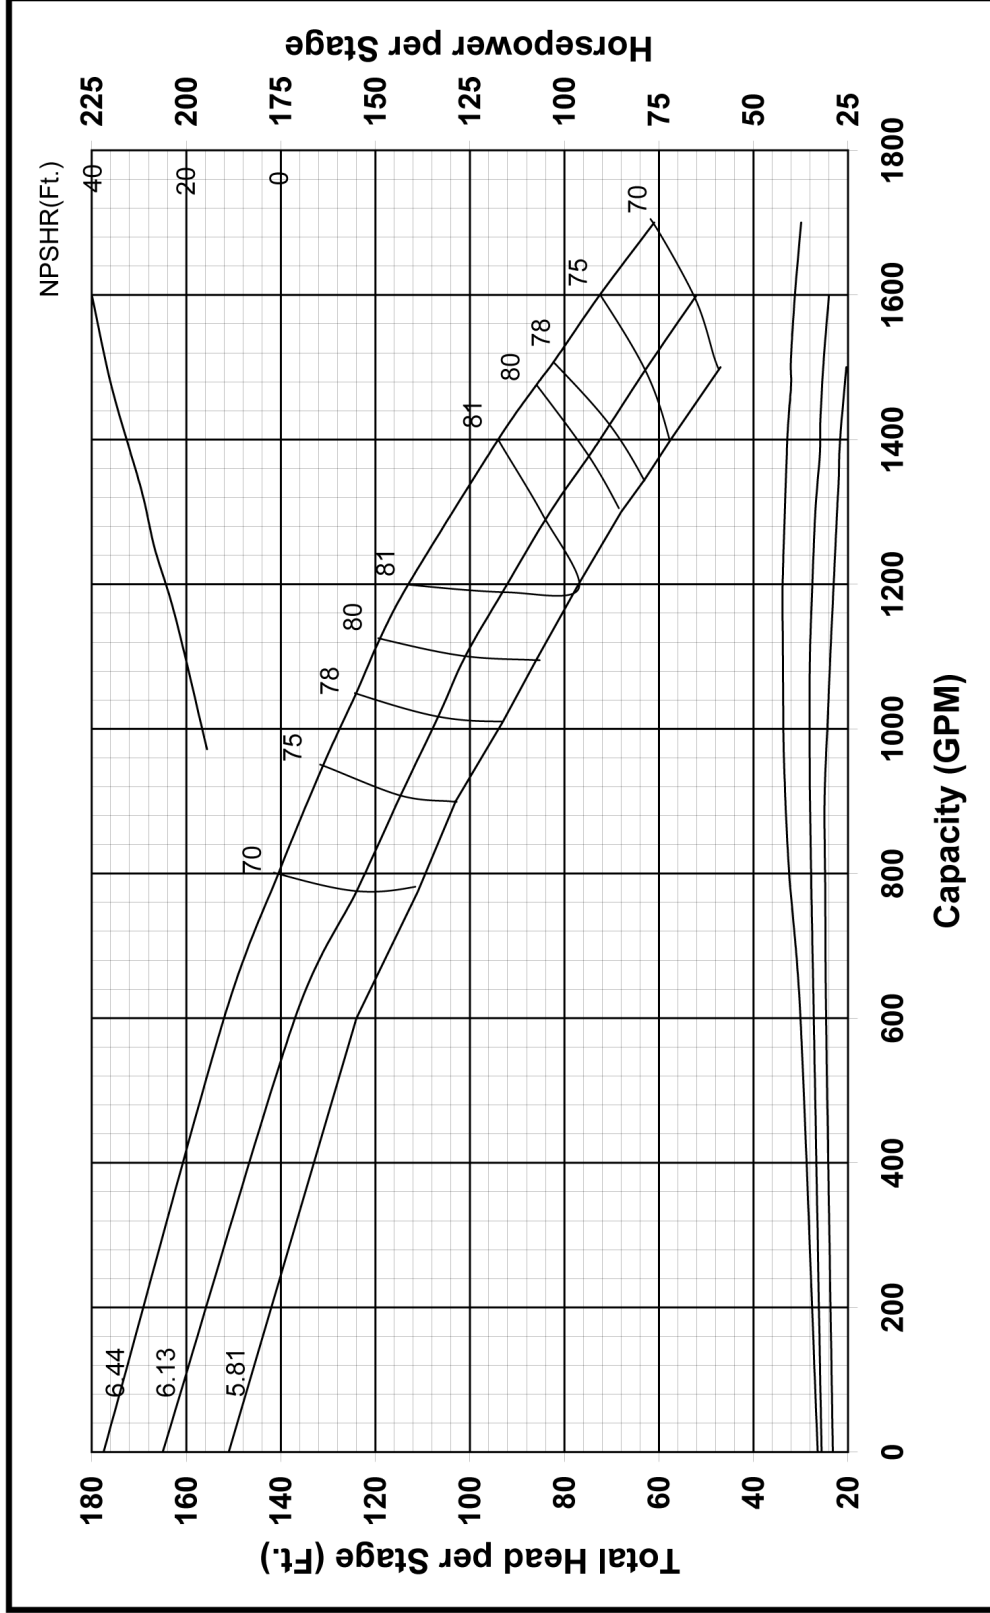

Curve No.	E6209TAPC1
Model	9TLC
RPM	3450
EFFICIENCY CORRECTION	
1-STAGE	
2-STAGE	
3-STAGE	
4-STAGE	
Impeller	ENCLOSED
Ns =	3740
K =	9.0 LBS/FT
K(Bal.) =	N/A
Bowl O.D.	9.25"
Bowl Lateral	0.75"
Max. PSI	530
Disch size	5", 6", 8"
TURBINE OPERATIONS	Lubbock, Texas
BOWL PERFORMANCE CURVE BASED ON PUMPING CLEAR, NON-AERATED WATER. RATED POINT ONLY IS GUARANTEED. CURVES REPRESENT SINGLE STAGE PERFORMANCE BASED ON TEST OF MULTI-STAGE BOWL ASSEMBLY. EFFICIENCY CORRECTION IS REQUIRED FOR LESSER STAGES.	



Goulds Pumps is a brand of ITT Corporation.
www.goulds.com

Engineered for life

